


$$TCR^2 = [TS \times TC]$$

Boost Turbocharger Reliability

Eliminate dry bearing at startup and hot shutdown failure.

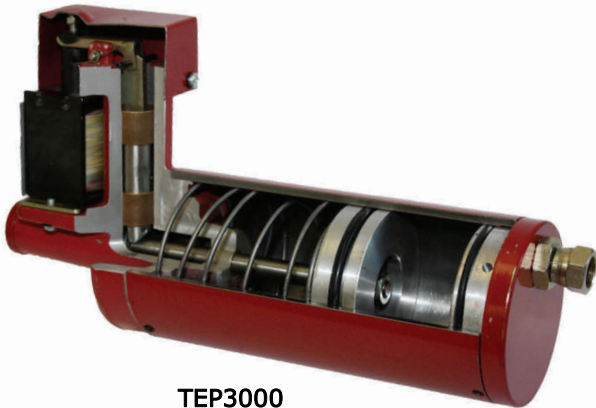

TEP3000

the turbo protector

TURBOSAFE

Spring loaded piston accumulator (TS) instantly pumps oil into the turbocharger (TC) on engine start-up and gradually on shut-down which more than doubles turbo life (TCR²).

Precision engineered for automatic operation & maintenance free life cycle.

Compatible with all makes & models of engines & turbochargers.

Reduce Equipment Down Time • Lower Operating Costs

The TurboSafe TEP 3000 is a simple and robust solution which eliminates turbocharger failure from dry bearing at startup and hot shutdowns. It is precision engineered to provide automatic operation, a maintenance free life cycle and is fully compatible with all makes & models of engines & turbochargers.

**Industrial • Marine • Power Generation • Military Vehicles
Fire Trucks • Water Pumps • Construction & Mining Equipment**

Oil Starvation Is The Largest Single Cause Of Turbocharger Failure.

more detailswww.turbosafepius.com

Tel: +1 905-362-0423
sales@dieselproducts.com

